



GLASS SWITCH LED INVERTER


INSTALLATION MANUAL

GLASS SWITCH LED INVERTER


INSTALLATION MANUAL

Most likely you will already have the glass switches installed and know how to access the back of the waterfall panel. Let us start there with the instructions.

1. Remove the original plug from the Sport button and insert the female white plug from this kit. The **blue marked black cable must** be on the **left side of the switch** (seen from behind), see image on the right

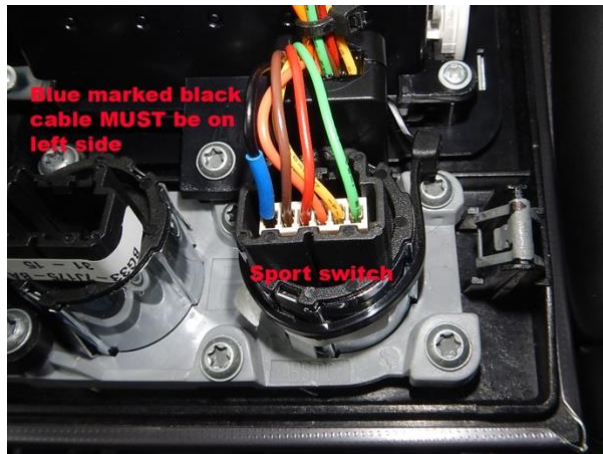


2. Remove backing paper of the adhesive strip on the electronic box and affix to the top of the switch, secure with a zip tie, put the lock of the zip tie in the same position as in the image.

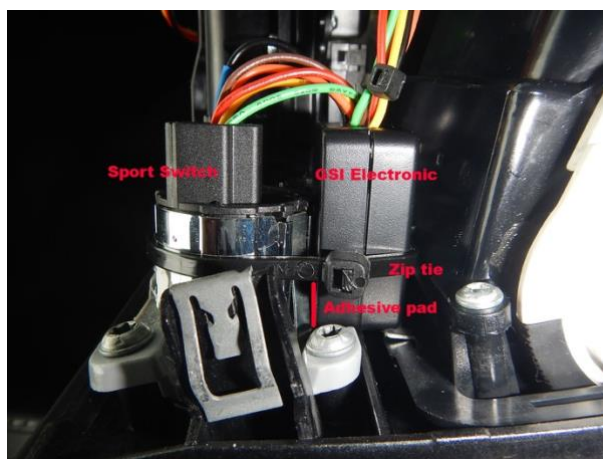

3. Connect the male connector from the kit to the plug which you just removed from the Sport switch. Make sure that the **blue marked black cable** goes to the **right side of the female plug** as in the picture.

It is a good idea to secure this connection with insulation tape to prevent it from getting disconnected by vibrations

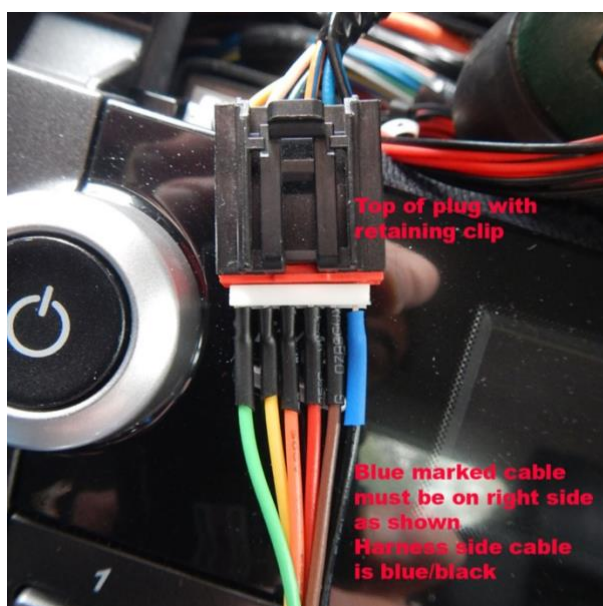

GLASS SWITCH LED INVERTER

INSTALLATION MANUAL

4. Make the cabin fuse box accessible:

To get to the fuse box you need to remove the over mat and tear the floor carpet back (it is only fixed with double sided tape) then you see the fuse box.

Unscrew the 7 Torx screws (T30) and remove the lid.



Pull the carpet on the top left side back so you can see the connectors as shown on the image. This is where the cable comes down from the top of the dash.




5. Pass the orange cable with the fuse adapter first down to the CEM which is located in the fuse box in the passenger foot well. There is plenty of space on the right side.



GLASS SWITCH LED INVERTER



INSTALLATION MANUAL

6. Grab the cable and route it through the existing opening (a black conduit is running through this opening), and **protect** it from getting in contact with the aluminum using a zip tie, see image.

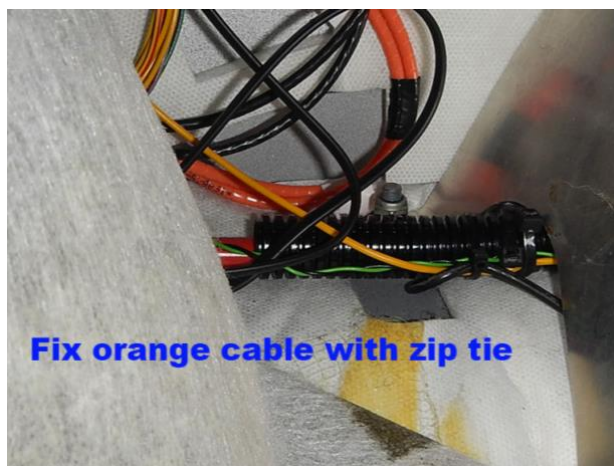

7. Remove fuse 73, put it into the empty slot on the fuse adapter. Insert fuse adapter into fuse box instead of the removed fuse.

Make sure that the cable runs **downwards** as in the picture.

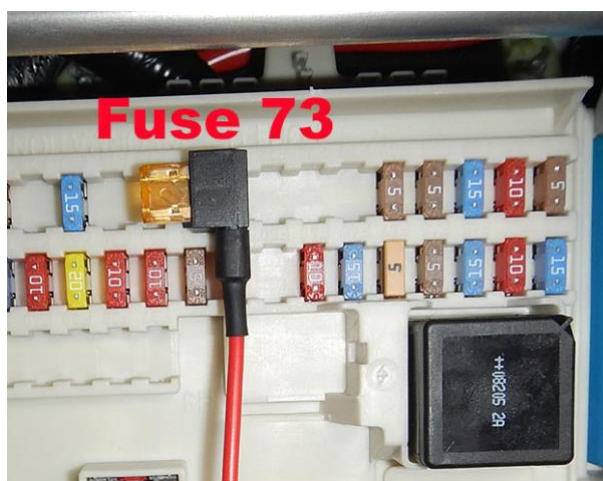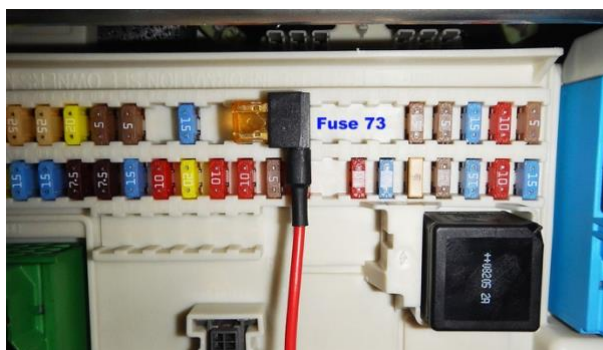

8. You are finished with the installation, now conduct a function check.

Insert the key and check that the LED in the Sport button is on when you are in Sport mode (the left display will show SPORT) and off in Comfort mode.

9. Put everything back to its place and enjoy the ride